


 1000V/1500V DC

 -40°C~85°C

 Low Smoke Zero Halogen

 UV Resistance

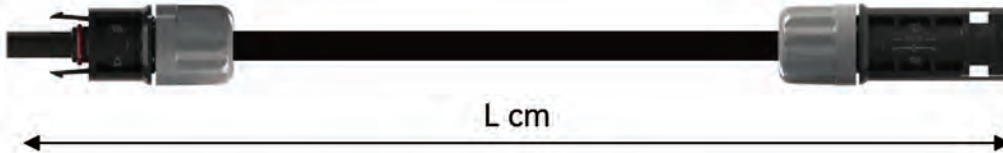

Female Connector	Male Connector	Cable Spec	Cable Length	Components	Cable Color
<input type="checkbox"/> MC4(Staubli)	<input type="checkbox"/> MC4(Staubli)	<input type="checkbox"/> 2.5 mm ²	<input type="checkbox"/> L: _____	<input type="checkbox"/> Seal Silicone Plug	<input type="checkbox"/> Black
<input type="checkbox"/> MC4-EVO2(Staubli)	<input type="checkbox"/> MC4-EVO2(Staubli)	<input type="checkbox"/> 4 mm ²		<input type="checkbox"/> Mechanical Protective Plug	<input type="checkbox"/> Red
<input type="checkbox"/> UTX(Amphenol)	<input type="checkbox"/> UTX(Amphenol)	<input type="checkbox"/> 6 mm ²			
<input type="checkbox"/> TS4(TrinaSolar)	<input type="checkbox"/> TS4(TrinaSolar)	<input type="checkbox"/> 10 mm ²			
<input type="checkbox"/> T4(CanadianSolar)	<input type="checkbox"/> T4(CanadianSolar)	<input type="checkbox"/> 16 mm ²			
<input type="checkbox"/> QC4.10(JASolar)	<input type="checkbox"/> QC4.10(JASolar)	<input type="checkbox"/> 14AWG			
<input type="checkbox"/> JKO3M(Jinko Solar)	<input type="checkbox"/> JKO3M(Jinko Solar)	<input type="checkbox"/> 2AWG			
<input type="checkbox"/> PV-LR5(Longi Solar)	<input type="checkbox"/> PV-LR5(Longi Solar)	<input type="checkbox"/> 10AWG			
<input type="checkbox"/> A4(NIU Power)	<input type="checkbox"/> A4 Max (NIU Power)	<input type="checkbox"/> 8AWG			
<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> 6AWG			

Remark:

- 1,The assembly use high customized connectors and cables.
- 2,Customized options available, please contact KUKA sales team: sales@kukacabke.solar

